

NILO D

INDOOR MINI DOWNLIGHTS /
MINI DOWNLIGHT PER INTERNI

TECHNICAL DATA / DATI TECNICI



IP40



2W



> 90



2200K / 2700K / 3000K / 4000K



10° / 23° / 43° / 70° / 10°x40°




FINISHES / FINITURE



.01

White RAL 9003
Bianco RAL 9003



.02


Black RAL 9005
Nero RAL 9005



.16


Flamed bronze
Bronzo brunito

TECHNICAL DRAWING / DISEGNO TECNICO

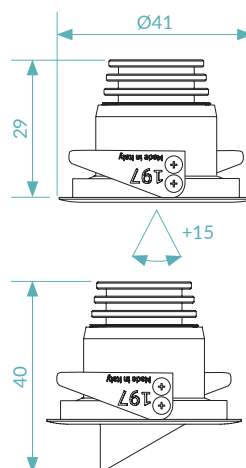

measure unit / unità di misura: mm

PRODUCT CODE / CODICE PRODOTTO

NID = NILO D		Select one component from each column to specify a complete configuration: <i>Seleziona un componente per ogni colonna per la configurazione completa:</i>			
		LED colour / Colore LED	Optics / Ottiche	Finish / Finiture	Power / Potenza
		22 = 2200K 27 = 2700K 30 = 3000K 40 = 4000K	N = 10° M = 23° W = 43° R = 70° E = 10°x40°	01 = White RAL 9003/ <i>Bianco RAL 9003</i> 02 = Black RAL 9005 / <i>Nero RAL 9005</i> 16 = Flamed bronze / <i>Bronzo brunito</i>	CC = 500mA

Standard configuration example:
Esempio di configurazione standard:

NID.30.N.01.CC | Nilo D 3000K 10° optics white / *bianco* 500mA



Project: Capital India corporate office, Mumbai