



AGILE 60 - GU10

TECHNICAL DATASHEET

PROJECT INFORMATION

Project Name:


Reference:

Quantity:




CE  IP66
MADE IN ITALY


TECHNICAL DRAWING

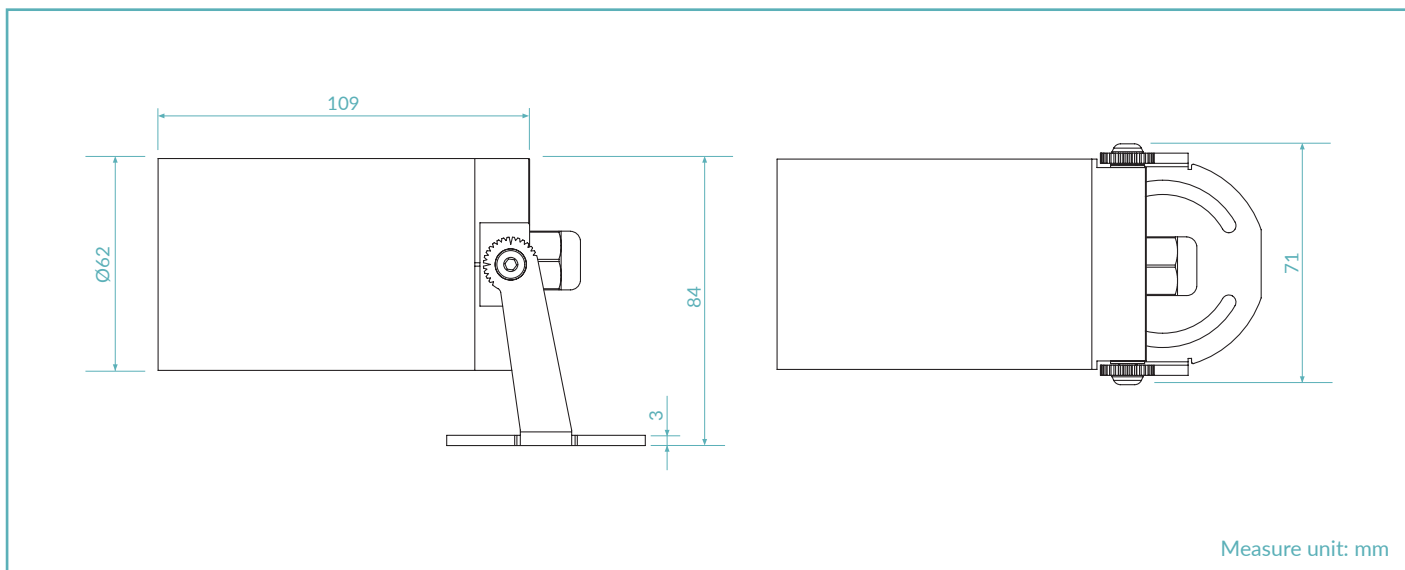

FINISHES

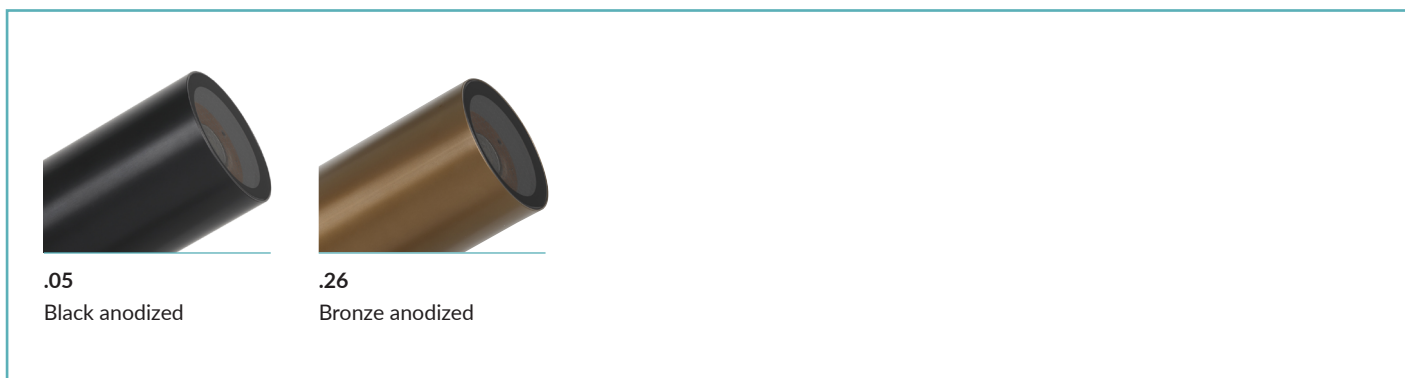

PRODUCT CODE

A6H = AGILE 60 GU10	Select one component from each column to specify a complete configuration:			
	LED colour	Optics	Finish	Power
	0	0	05 = Black anodized 26 = Bronze anodized	AC = 230Vac

Standard configuration example:

A6H.0.0.05.AC | Agile 60 GU10 black anodized 230Vac

TECHNICAL SHEET

MECHANICAL CHARACTERISTICS

Body	Anodized aluminium 6026
Glass	Tempered extra clear glass 5mm
Finishes	Black anodized / Bronze anodized
Installation	Surface mounted / Tree strap / Ground spike
Impact resistance	IK08
Weight	450g


ELECTRICAL CHARACTERISTICS

Power supply	120/230Vac 50/60 Hz GU10 Socket
Power supply cables	150cm H05RNF 3x1mm ²
Power consumption	Max 7,5 Watt
Dimmable	Trailing-edge dimmable
Lampholder	GU10

GENERAL CHARACTERISTICS


Operating temperature	-20°C +50°C
IP rating	IP66
Insulation class	Class I

ACCESSORIES

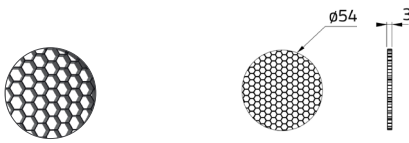

Honeycomb louver


Art. Nr.
ACC.172

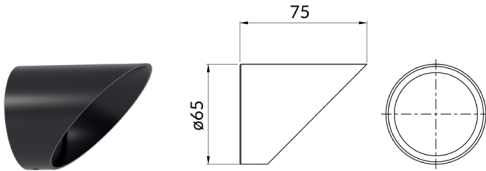

Snoot 45°

Art. Nr.
ACC.012

Finishes
.05 = Black anodized
.26 = Bronze anodized

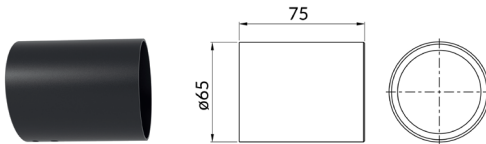

Snoot tube

Art. Nr.
ACC.107

Finishes
.05 = Black anodized
.26 = Bronze anodized




Tree strap

Art. Nr.
ACC.185

Finishes
.05 = Black anodized
.26 = Bronze anodized

Nr. Plates
.01 = Plate
.02 = Plates
.03 = Plates
.04 = Plates

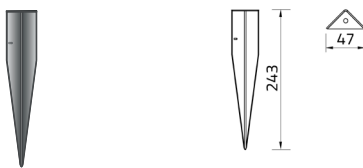

Ground spike

Art. Nr.
ACC.173

Finishes
.03 = Stainless steel AISI316L


Length
.024 = 243mm



Cable gland cover

Art. Nr.
ACC.192

ACCESSORIES



Lamps Soraa


Art. Nr.
LMSB

LED colour
.27 = 2700K
.30 = 3000K

Optics
.N = 10°
.M = 25°
.W = 36°
.F = 60°

Plug
.G10 = GU10

Power
.07 = 7,5W



Snap accessories
Soraa

Art. Nr.

ACC.180 = Elliptical optics 10°x60° (*)
ACC.181 = Orientation of the beam angle (*)
ACC.182 = CCT Shifter 1/2 (*)
ACC.183 = CCT Shifter 1/4 (*)
ACC.184 = CCT Shifter 3/4 (*)

(*Only for 10° optics)

OPTICS

