



# APOLLO CAFFÈ

TECHNICAL DATASHEET

## PROJECT INFORMATION

Project Name:


Reference:

Quantity:



DARK SKY CE III F IP66  
MADE IN ITALY

## TECHNICAL DRAWING

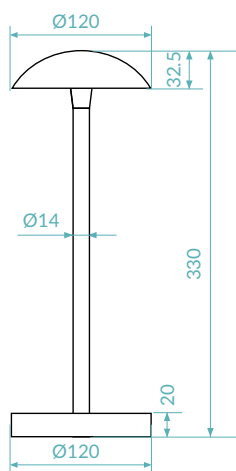

Measure unit: mm

## FINISHES



.01  
White RAL 9003



.02  
Black RAL 9005




.16  
Flamed bronze



.20  
Corten




.22  
Deep chromed black



.26  
Bronze anodized

## PRODUCT CODE

APC = APOLLO CAFFÈ		Select one component from each column to specify a complete configuration:		
	LED colour	Optics	Finish	Power
	24 = 2400K 27 = 2700K 30 = 3000K	D = Diffused	01 = White RAL 9003 02 = Black RAL 9005 16 = Flamed bronze 20 = Corten 22 = Deep chromed black 26 = Bronze anodized	02 = 2W

Standard configuration example:

**APC.30.D.01.02** | Apollo Caffè 3000K diffused optics white 2W

## TECHNICAL SHEET

### LIGHTING CHARACTERISTICS

Color Rendering Index	CRI > 90
Lumen output (source)	147 lm (3000K)
Lumen output (delivered)	143 lm (3000K)
Optics	Diffused
LED colour temperature	2400K / 2700K / 3000K
LED lifetime	50000h L95 B10 (Ta 25°C)
Bin selection	Binning free 2 step MacAdam's

### MECHANICAL CHARACTERISTICS

Body	Aluminium anticorodal 6082
Finishes	White RAL 9003 / Black RAL 9005 / Flamed bronze / Corten / Deep chromed black / Bronze anodized
Impact resistance	IK07
Weight	910g

### ELECTRICAL CHARACTERISTICS

Power supply	Integrated battery 6000mAh 22.2Wh
Power supply cables	USB-C
Power consumption	2 Watt
Dimmable	Dimmable

### GENERAL CHARACTERISTICS

Operating temperature	-20°C +50°C
IP rating	IP66
Insulation class	Class III
Independent charge	Approx. 8 hours
Charging time	Approx. 8 hours
Photobiological risk	RG0/RG1

## OPTICS

