



# VARIO 60 S HV

TECHNICAL DATASHEET

## PROJECT INFORMATION

Project Name:


Reference:

Quantity:



CE IP66  
MADE IN ITALY


## TECHNICAL DRAWING

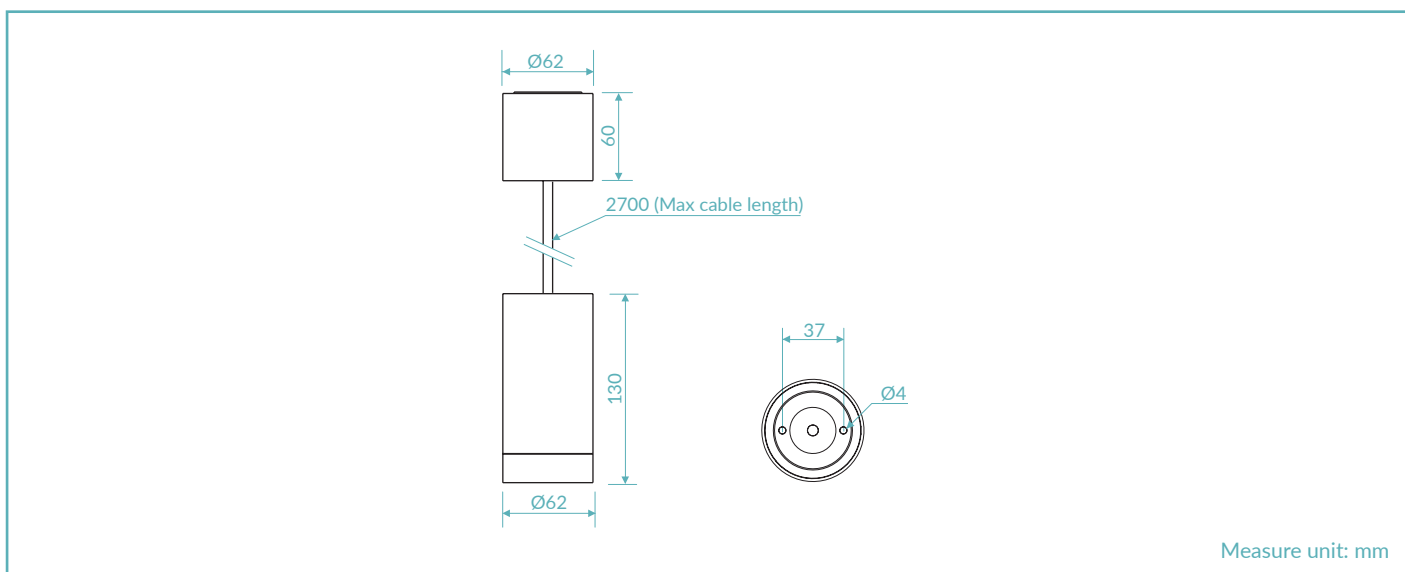

## FINISHES



## PRODUCT CODE

<b>V6SH = VARIO 60 S HV</b>	Select one component from each column to specify a complete configuration:		
	<b>LED colour</b> 27 = 2700K 30 = 3000K 40 = 4000K	<b>Optics</b> N = 10° M = 30° W = 50° E = 10°x45°	<b>Finish</b> 01 = White RAL 9003 05 = Black anodized 07 = Natural anodized 16 = Flamed bronze 20 = Corten 23 = Green RAL 6003
			<b>Power</b> 09 = 9W

Standard configuration example:

**V6SH.30.N.05.09** | Vario 60 S HV 3000K 10° optics black anodized 9W

## TECHNICAL SHEET

### LIGHTING CHARACTERISTICS

Color Rendering Index	CRI > 90
Lumen output (source)	896 lm (3000K)
Lumen output (delivered)	590 lm (3000K)
Optics	10° / 30° / 50° / 10°x45°
LED colour temperature	2700K / 3000K / 4000K
LED lifetime	50000h L95 B10 (Ta 25°C)
Bin selection	Binning free 2 step MacAdam's

### MECHANICAL CHARACTERISTICS

Body	Anodized aluminium 6026
Glass	Tempered extra-clear 5mm
Finishes	White RAL 9003 / Black anodized / Natural anodized / Flamed bronze / Corten / Green RAL 6003
Installation	Suspensions
Impact resistance	IK08
Weight	835g


### ELECTRICAL CHARACTERISTICS

Power supply	220 - 230 Vac 50/60 Hz
Power supply cables	Max 270cm H05RN-F 3x0,75mm <sup>2</sup>
Power consumption	9 Watt
Dimmable	Dimmable Triac

### GENERAL CHARACTERISTICS


Operating temperature	-20°C + 50°C
IP rating	IP66
Insulation class	Class I
Photobiological risk	RG0 / RG1

ACCESSORIES

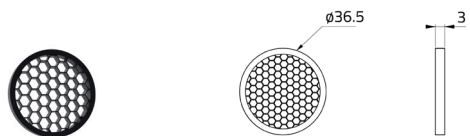

Honeycomb louver


Art. Nr.  
ACC.004

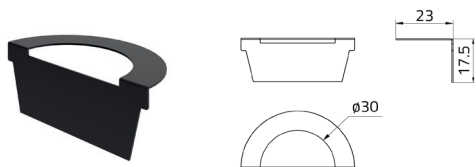

Anti-Glare louver

Art. Nr.  
ACC.073

OPTICS

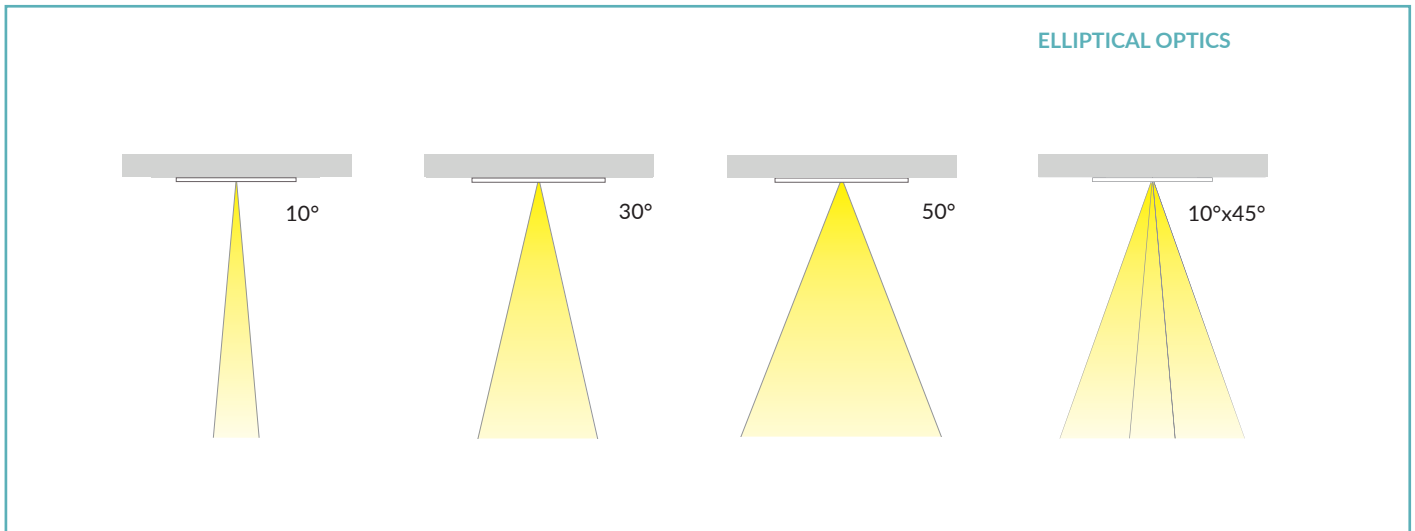

PHOTOMETRICS

